

# Bronze Range

## Why choose the Bronze Range?

- Suitable for domestic, commercial or industrial use
- Cast in high quality bronze
- Multi speed settings available
- Optimum performance, reliability and maintenance free operation
- Ideal for single or multi-pump networks
- For use in new systems or as a replacement



## Bronze Range Secondary hot water domestic and commercial circulators

Our bronze bodied SE20B and SE60B pumps are an ideal option when installing a secondary hot water circulator for domestic and commercial buildings.

### Operating Parameters

#### Operating parameters for SE20B


Liquid temperature range	-10°C to 95°C
Max. working pressure	10 Bar
Weight	2.4kg
Protection level	IP42

#### Operating parameters for SE60B


Liquid temperature range	-10°C to 110°C
Max. working pressure	10 Bar
Weight	2.5kg
Protection level	IP42

### Performance Curves

SE20B

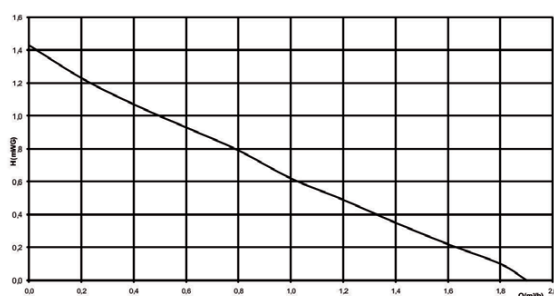

SE60B

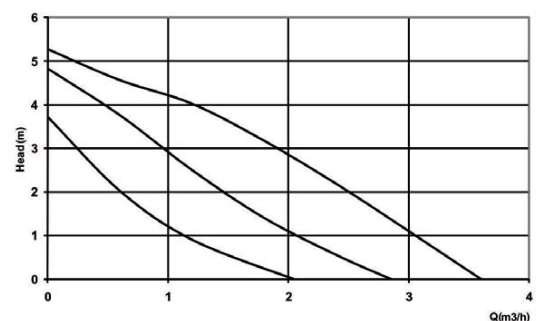

### Technical Data

Model	Speed Setting	Speed (rpm)	Watts Input	Amps
SE20B	1	2350	24	0.10
SE60B	3	2515	63	0.28
	2	2080	54	0.24
	1	1355	41	0.19

Supply voltage: 230V ~ 50 Hz